

Metal Eave Vent

Product Description

The Metal Eave Vent is manufactured from non-combustible materials in order to suit ventilation requirements for homes requiring compliance with AS3959-2009.

This product should be used in conjunction with a roof ventilator or air extraction system, and allows for air to flow into the roof cavity.

The Metal Eave Vent is suitable for use in zones up to BAL-40.

This product is not suitable for BAL-FZ installations.

Applications

The Metal Eave Vent has been designed to be used in conjunction with an air extraction ventilator. The result will be air flow through the roof cavity allowing for effective heat removal and condensation control.

Benefits

Allows roof ventilators to work more efficiently. Complies with the requirements of AS3959-2009 up to a BAL level of BAL-40.

SKU Table

Item	Code
2 Pack - White	121274


Specifications

Frame	Aluminium 5005
Mesh	Stainless Steel 304 1.9x0.6mm Woven Mesh
Rivets	Zinc Plated Steel
Coating	Powdercoated - White
Fixings	Class 3 Phillips Wafer Head Tek Screws 10Gx16mm
Weight (single unit)	255 grams


Metal Eave Vent

Performance

Flow Resistance Chart

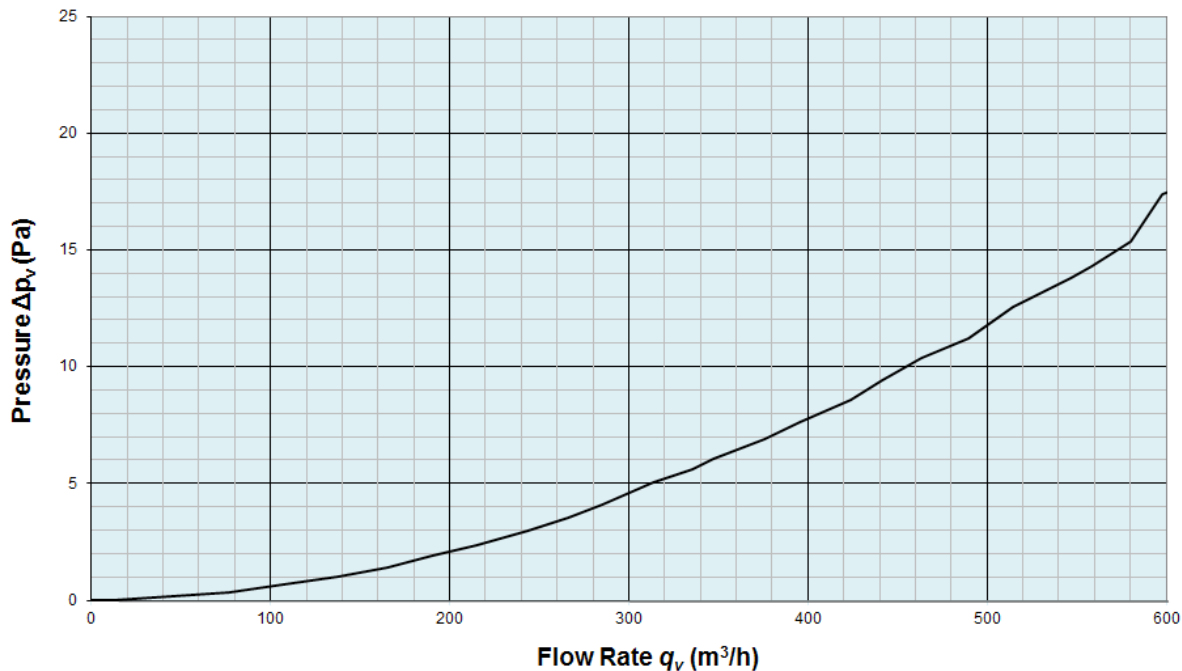

Drawing

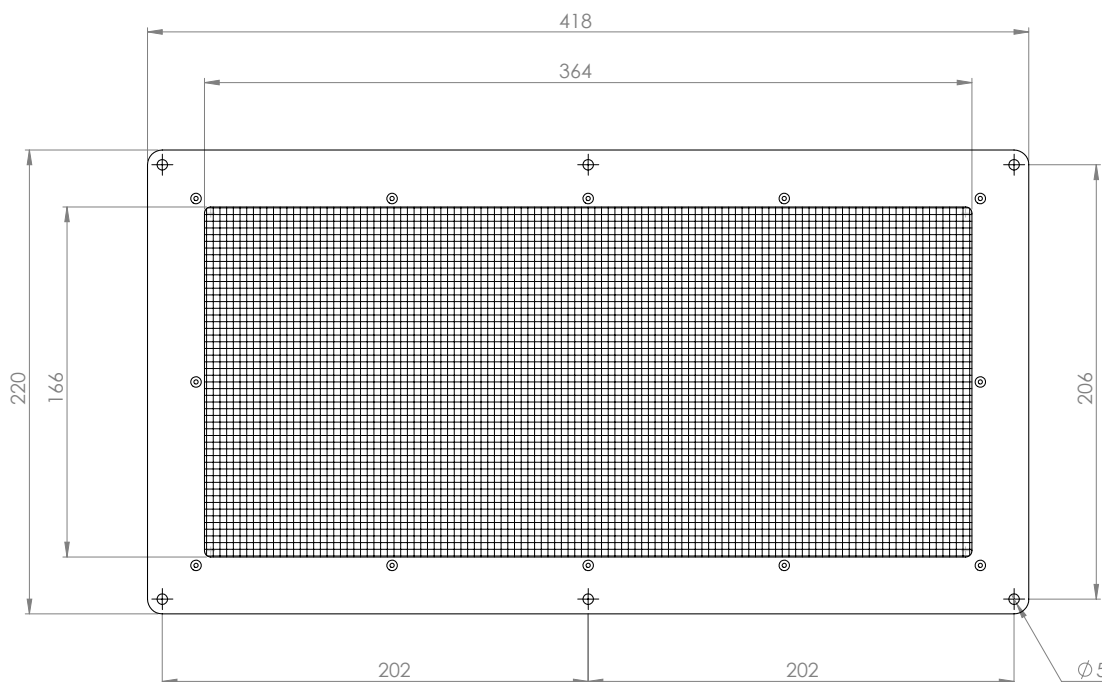

Bradford Ventilation
10 Stanton Road, Seven Hills NSW 2147 Australia.



Global-Mark.com.au®

www.bradfordventilation.com.au

CSR Bradford is a business division of CSR Building Products Limited ABN 55 008 631 356

The contents of this brochure are copyright protected and may not be reproduced in any form without prior written consent of CSR Bradford. Recommendations and advice regarding the use of the products described in this brochure are to be taken as a guide only, and are given without liability on the part of the company or its employees. We reserve the right to change product specifications without prior notification, please refer to the Bradford website for the latest version of this document. The purchaser should independently determine the suitability of the product for the intended use and application.